



fitted with

work equipment

connected load
power consumption

light distribution

glare-free

system of protection

class of protection

technology

usage

luminaire body

lamp cover

mains supply

design

fastening

dimension

special features

1 x regular fluorescent lamp T16 39W/865 G5

light colour daylight white

Energy efficiency category A

electronic ballast

Energy efficiency index (EEI): A3

24 V; DC

approx. 39 W

direct

conical prismatic screen

IP 68-1m / IPX9 nach DIN EN 60529

I

switchable

external

sectional aluminium, anodised,

glass screen

built-in plug

0942 046GM

integrated version

screws

960

plug (accessories) on demand




0942 046GM

illuminance

Comment: d=100cm

Em: 601 lx
Emax: 766 lx
Emin: 404 lx

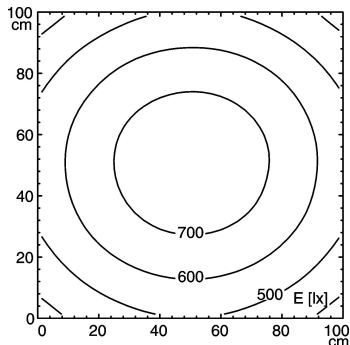

luminous intensity

