



fitted with

work equipment

connected load
power consumption
light distribution
glare-free
system of protection
class of protection
technology
usage
luminaire body
lamp cover
mains supply

design
fastening
dimension

1 x regular fluorescent lamp T16 39W/865 G5
light colour daylight white
Energy efficiency category A
electronic ballast
Energy efficiency index (EEI): A3
24 V; DC
approx. 39 W
direct
conical prismatic screen
IP 68-1m / IPX9 nach DIN EN 60529
I
switchable
external
sectional aluminium, anodised,
glass screen
built-in plug
US-ConnectionStandard
mounted version
screws
960




0942 046GM

illuminance

Comment: d=100cm

Em: 1096 lx
Emax: 1395 lx
Emin: 723 lx

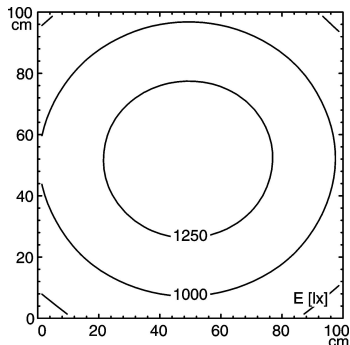

luminous intensity

