



**fitted with**

**work equipment**  
**connected load**  
**power consumption**  
**luminous flux**  
**luminous efficacy**  
**light colour**  
**color rendering index (CRI)**  
**glare-free**  
**system of protection**  
**class of protection**  
**technology**  
**usage**  
**luminaire body**

**weight (net)**  
**mains lead**

**design**  
**fastening**  
**special features**

**LED**


Energy efficiency category A+  
electronic transformer  
100-240 V; 50/60 Hz  
approx. 34 W  
approx. 1950 lm  
approx. 57 lm/W  
neutral white, approx. 5000 K  
> 80  
conical prismatic screen  
IP 20  
II  
continuously dimmable  
push button  
sectional aluminium, anodised, aluminium coloured  
anodised  
approx. 1.8 kg  
approx. 5 m; mains plug  
CEE 7/XVI  
mounted version  
screw-down bracket; horizontal  
fixed connection



CEE 7/XVI

**illuminance**

distance: 50 cm  
**Em:** 1641 lx  
**Emax:** 4046 lx  
**Emin:** 329 lx

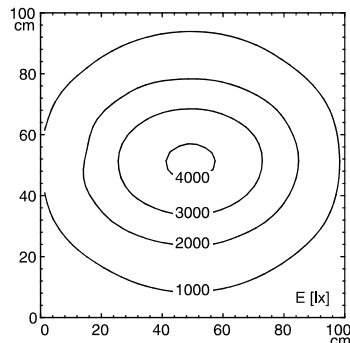

**luminous intensity**

