



## fitted with

work equipment  
connected load  
power consumption  
luminous flux  
luminous efficacy  
light colour  
color rendering index (CRI)  
glare-free  
system of protection  
class of protection  
technology  
usage  
luminaire body  
weight (net)  
mains supply

fastening  
special features

## LED

Energy efficiency category A+  
electronic ballast  
220-240V; 50/60Hz  
approx. 18 W  
approx. 1500 lm  
approx. 83 lm/W  
neutral white, approx. 4000 K  
> 80  
conical prismatic screen  
IP 20  
I  
continuously dimmable  
rocker switch  
aluminium/plastic, anodised, aluminium coloured anodised  
approx. 3.4 kg  
connection box, built-in plug  
GST 18i3F REV  
screw down lash  
through-wired




GST 18i3F REV

## illuminance

distance: 100 cm

Em: 606 lx  
Emax: 841 lx  
Emin: 345 lx

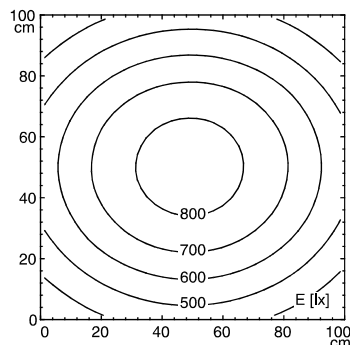

## luminous intensity

