



fitted with

work equipment

connected load
power consumption
luminous flux
luminous efficacy
glare-free
system of protection
class of protection
technology
usage
luminaire body
weight (net)
mains lead

fastening
special features

1 x regular fluorescent lamp T16 39W/840 G5
light colour neutral white
Energy efficiency category A
electronic ballast
Energy efficiency index (EEI): A1 BAT
220-240V; 50/60Hz
approx. 44 W
approx. 2400 lm
approx. 55 lm/W
conical prismatic screen
IP 20
I
continuously dimmable
rocker switch
aluminium/plastic, anodised, aluminium coloured anodised
approx. 4.3 kg
approx. 0,3 m; connection box, built-in plug
GST 18i3S
screw down lash
through-wired




GST 18i3S

illuminance

Comment: d=100cm

Em: 915 lx
Emax: 1229 lx
Emin: 553 lx

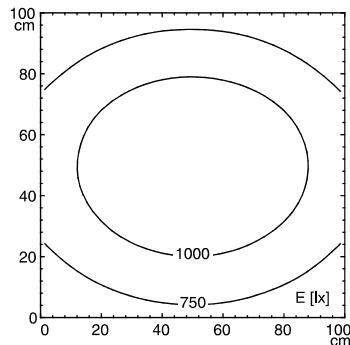

luminous intensity

